

SAFETY NOTICE – PLEASE READ BEFORE FITTING YOUR FILTER

**We strongly recommend the fitting of a pressure reduction valve
and water shut off block with your new filter**


**Instanta cannot be held responsible for any damage caused by
leaking filters should these recommendations not be followed**

**Filters should always be changed no later than six months after
fitting**

INSTRUCTIONS

**Unit 1, Canning road, Southport, Merseyside PR9 7SN
Tel: (01704) 501114 Fax: (01704) 501115**

AQ2/AQ3 REPLACEMENT SCALE INHIBITOR CARTRIDGE C/W FITTINGS

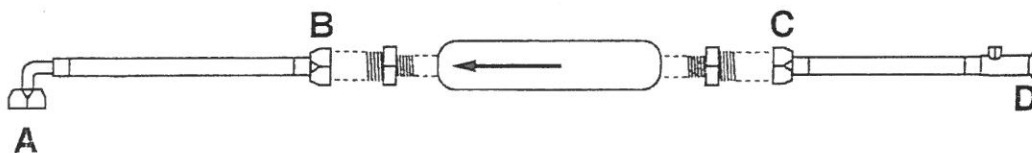

TO CHANGE CARTRIDGE

- Turn off water supply at shut-off valve (D)
- Disconnect the hose assembly from the cartridge by loosening the $\frac{3}{4}$ " plastic nuts (B) & (C)
- Discard old cartridge and replace with new (Note: arrow shows direction of water flow)
- Re-connect the hose assembly at (B) and (C)
- Remove connection (A) from machine and place end of hose over sink (or similar). Turn water supply back on at (D) and allow 4 gallons of water to flush through.
- Re-connect to machine, and turn water supply back on at the shut-off valve (D)
- Check for leaks

RESET KEY FOR ELECTRONIC MONITOR (AQ2 ONLY)

- Switch machine off. Remove old key and discard
- Push new key into position, ensuring it is the correct way up.
- Switch machine back on. Indicator light on monitor box will illuminate GREEN for normal operation.