


## Jumbo analogue to digital conversion set

set contains: # 8000102 complete panel holder with On/Off switch, meter and digital PCB



Present situation, analogue front panel

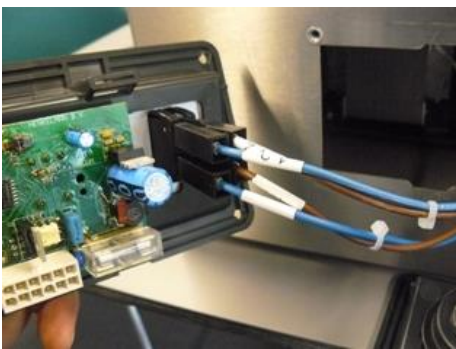

Remove the panel and find the 4 connectors on the On/Off switch and 3 connectors on the board.

Please note that the colours of the present wires can be different depending on the age of the machine


The wires from the On/Off switch ABOVE each other will be connected when the switch is activated. On the picture these wires are blue as an example. Mark those 2 wires, so they are recognisable.



The position of the 3 wires are specified on the board by:

**Pump, Fase and Trafo.**

Make sure that the connector that comes from **Pump** on the analogue board, goes to the **Pump** position on the digital board. The same goes for the wires that come from the **Fase** and **Trafo** connections.

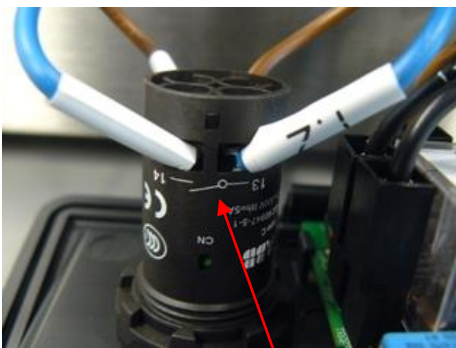

Connect the (marked) wires from the On/Off switch in such a way that they are connected when the switch is activated.

These positions are shown as a symbol on the switch.  
(see red arrow)

Connect the white connector to the digital board and place back the panel.  
Now the machine is ready for use.