




F10/H10 Explosive view

ISSUE: 01


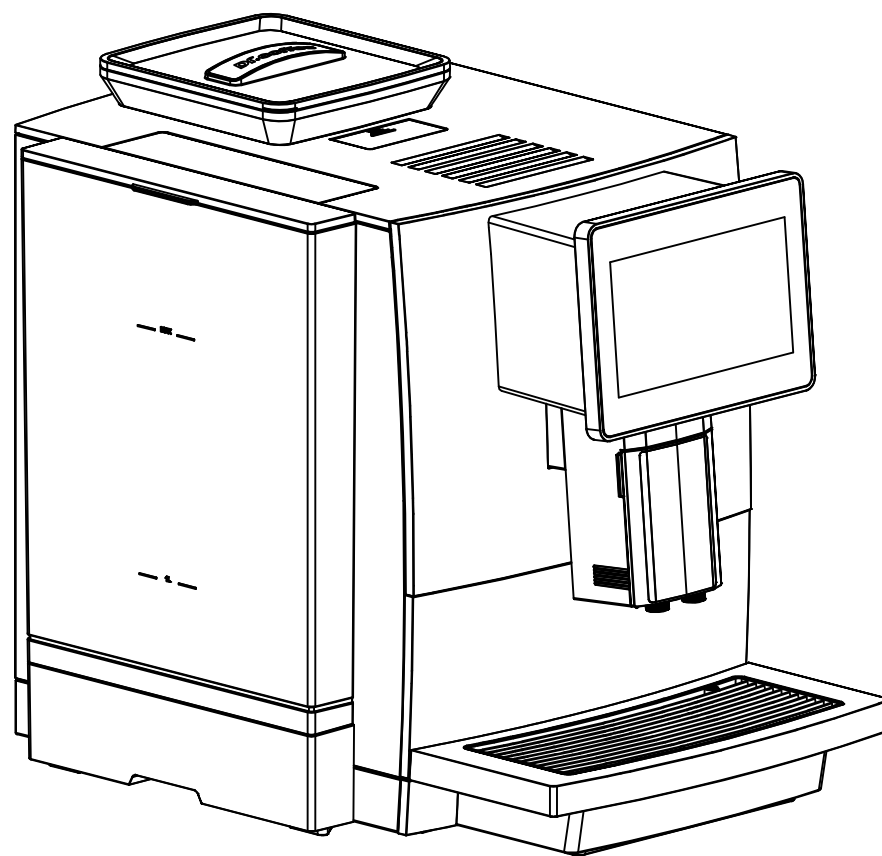


Content

Appearance group.....	01
Body holder.....	02
Water tank group.....	03
Front pannel assembly.....	04
Drip tray group.....	05
Brew group.....	06
Thermoblock assembly.....	07
Pump group.....	08
Ginder group.....	09
Water inlet valve group.....	10

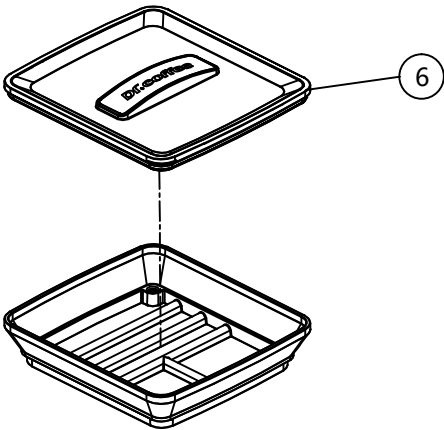
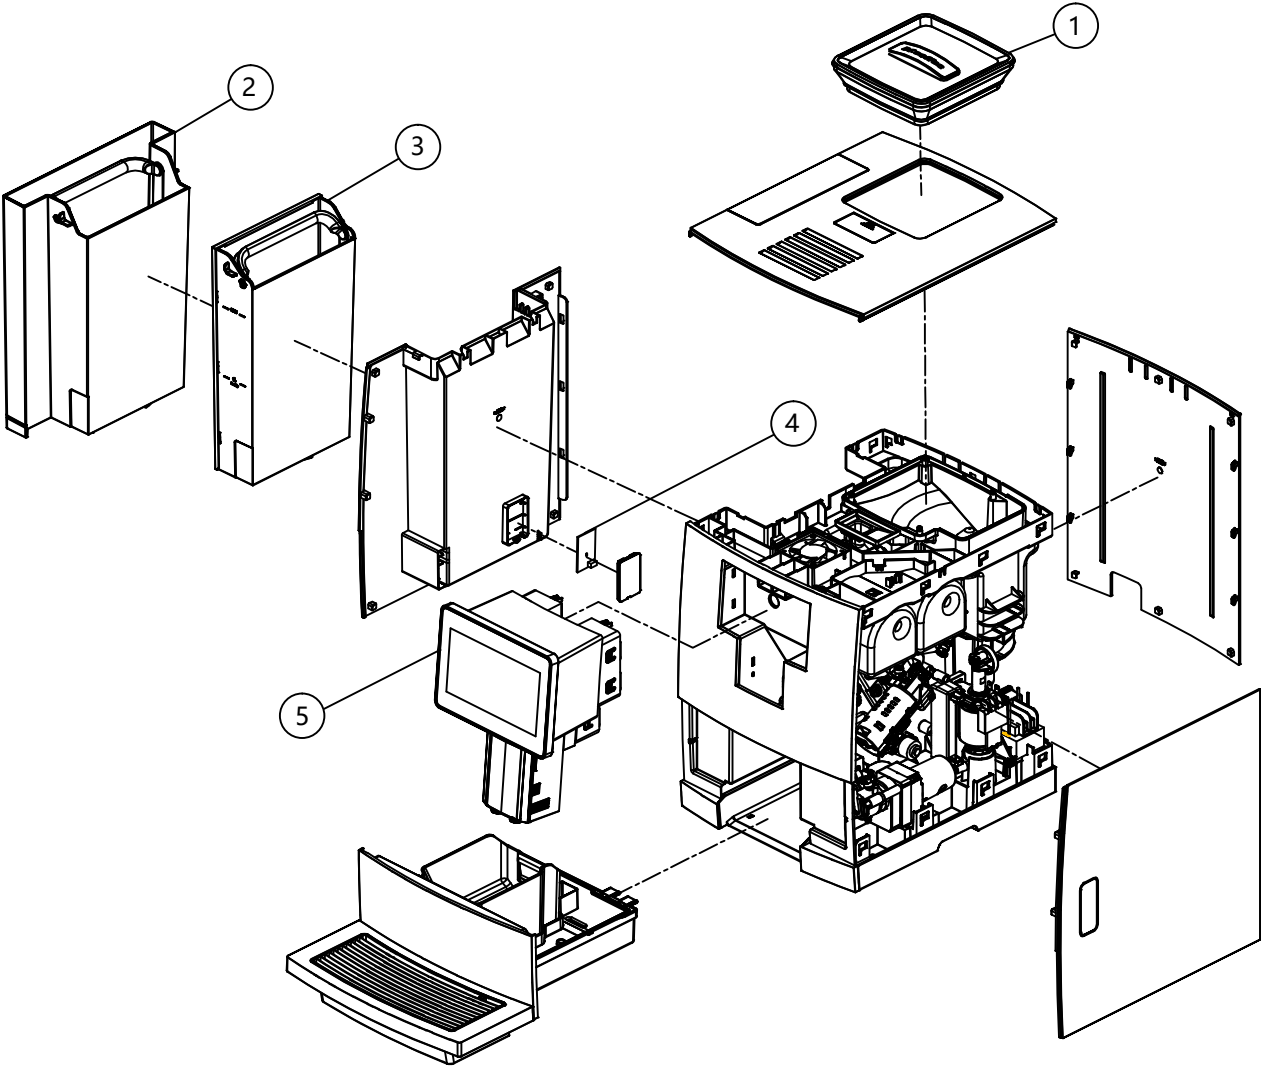


ITEM	DWG NO.	ENGLISH NAME	名称
1	7.NN.0313	Bean container Group	F10豆盒组
2	7.NN.0319	Big water tank group(F10)	F10大水箱组(F10)
3	7.NN.0017	Small water tank group(H10)	F11小水箱组(H10)
4	8.D.1.0027	Water level detection PCBA	水位检测PCB
5	7.NN.0326	Front pannel assembly	F10前面板组
6	7.NN.0121	Bean container cover	F11豆盒盖组

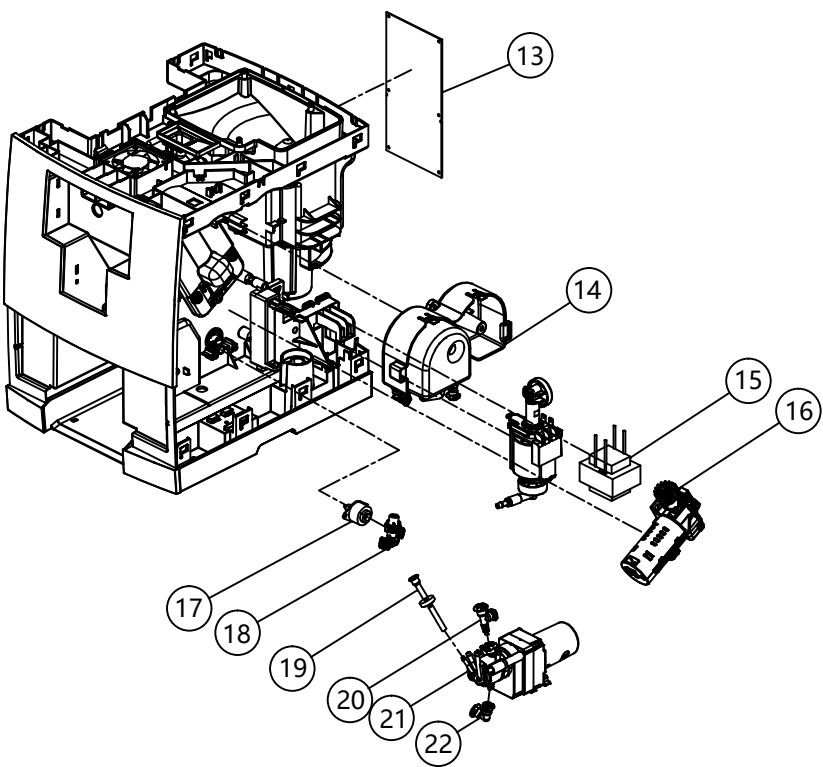
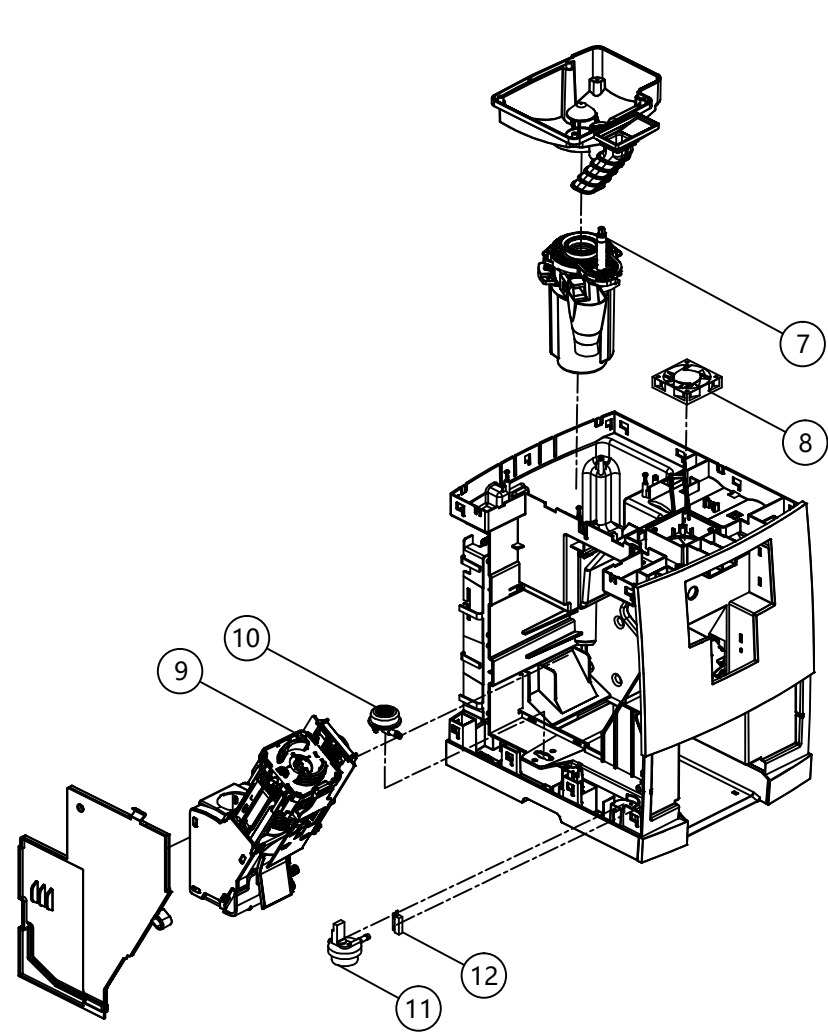


ITEM	DWG NO.	ENGLISH NAME	名称
7	7.NN.0112	Ginder group	F09磨豆组
8	8.D.3.0019	Fan	风扇
9	7.NN.0103	Brew group	F09冲泡器组
10	7.NN.0014	Water inlet valve group	F11导水座组
11	8.D.3.0017	Flowmeter270° (1.2mm)	流量计270度 (1.2mm)
12	8.D.3.0013	Reed switch	干簧管


ITEM	DWG NO.	ENGLISH NAME	名称
13	8.D.1.0041V1	Main PCBA	F10主板
14	7.NN.0325	Thermoblock assembly	F10电热盘组
15	8.D.3.0016	Transfomer	F11变压器
16	7.NN.0115	Brew motor group	F11传动组
17	8.D.3.0014	Stepmotor	泄压步进电机
18	7.NN.0009	Dispenser valve 3W	蓄压阀组
19	7.NN.0202	Air inlet valve assembly	鸭嘴阀组
20	8.S.1.0144	Fitting	三通转接头
21	7.NN.0011	Switch valve assembly	F11分向阀组
22	8.S.1.0136	Fitting	分向阀转接头

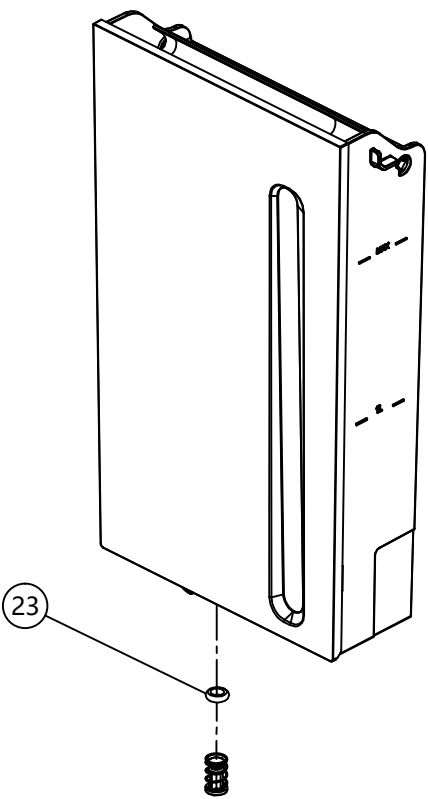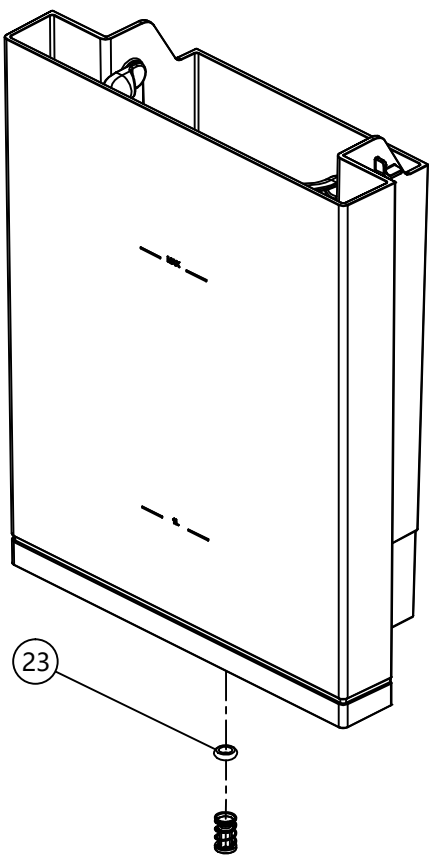


ITEM	DWG NO.	ENGLISH NAME	名称
23	8.G.1.0001	O-ring $\phi 5.0 \times \phi 3.0$	水箱止逆阀密封圈

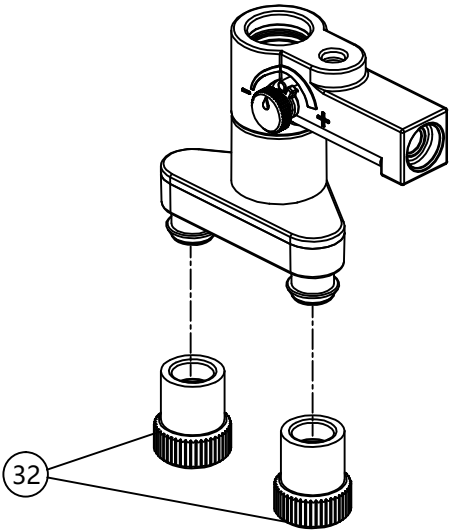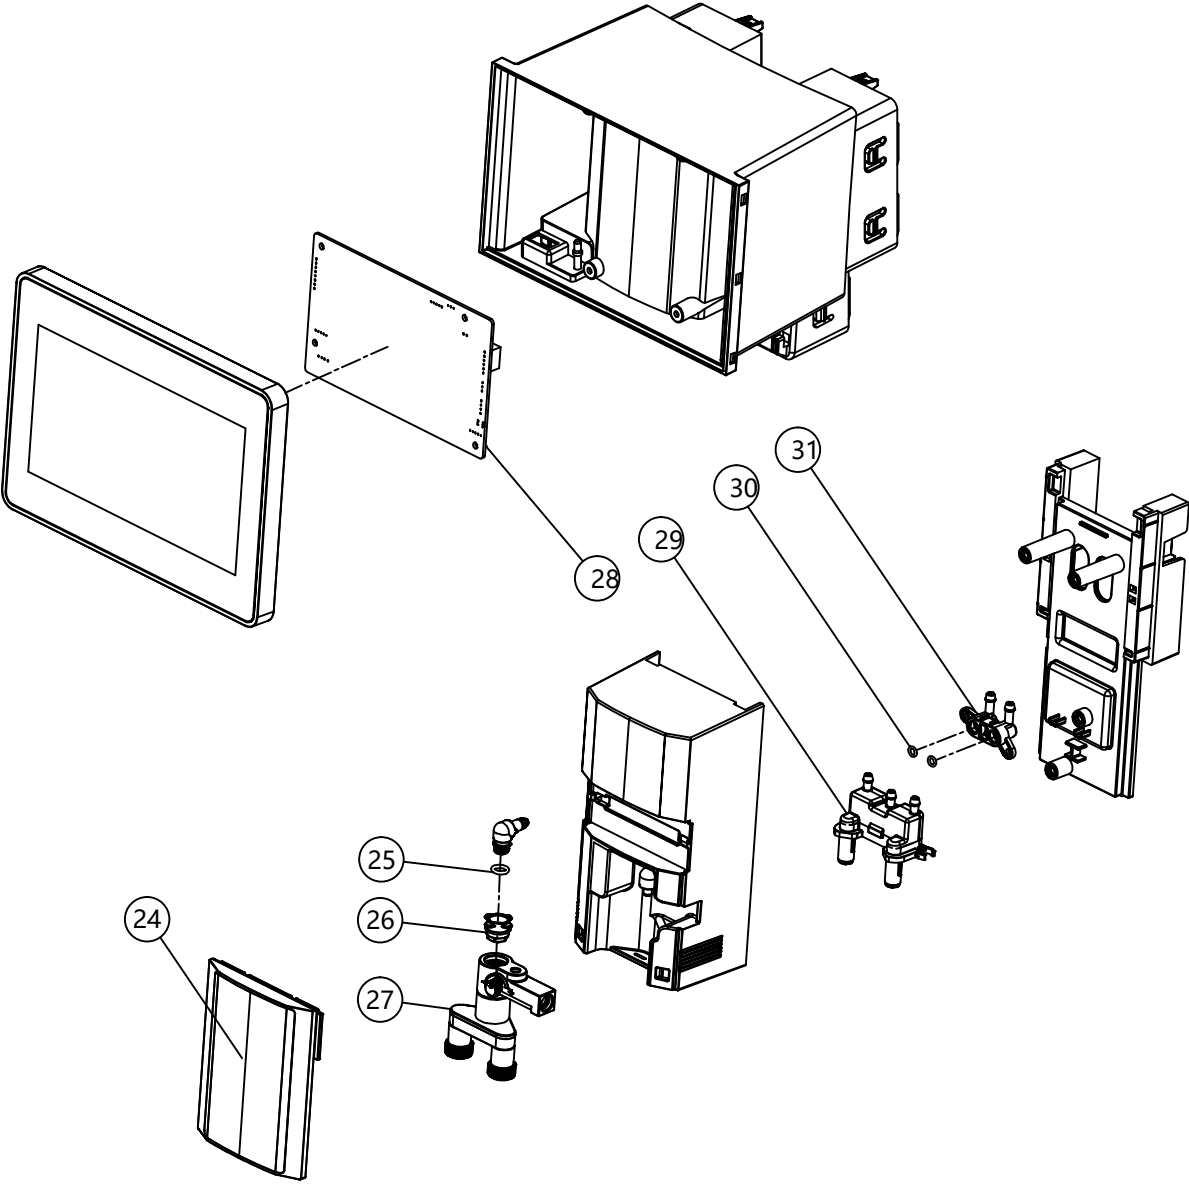


ITEM	DWG NO.	ENGLISH NAME	名称
24	7.NN.0125	Coffee outlet cover group	咖啡出口盖组
25	8.G.1.0002	O-ring $\phi 6 \times \phi 2.0$	喷嘴密封圈
26	8.S.1.0047	Milk bubble nozzle	蒸汽喷嘴
27	7.NN.0116	Foamer	奶沫器组
28	8.D.1.0010	HMI PCBA	F12(M) HMI板
29	8.S.1.0333	Coffee outlet	咖啡出口
30	8.G.1.0003	O-ring $\phi 3.6 \times \phi 1.2$	分向阀密封圈
31	8.S.1.0043	Steamer fitting	蒸汽转接管
32	8.G.2.0035	Foam applicator	奶沫器缓冲嘴

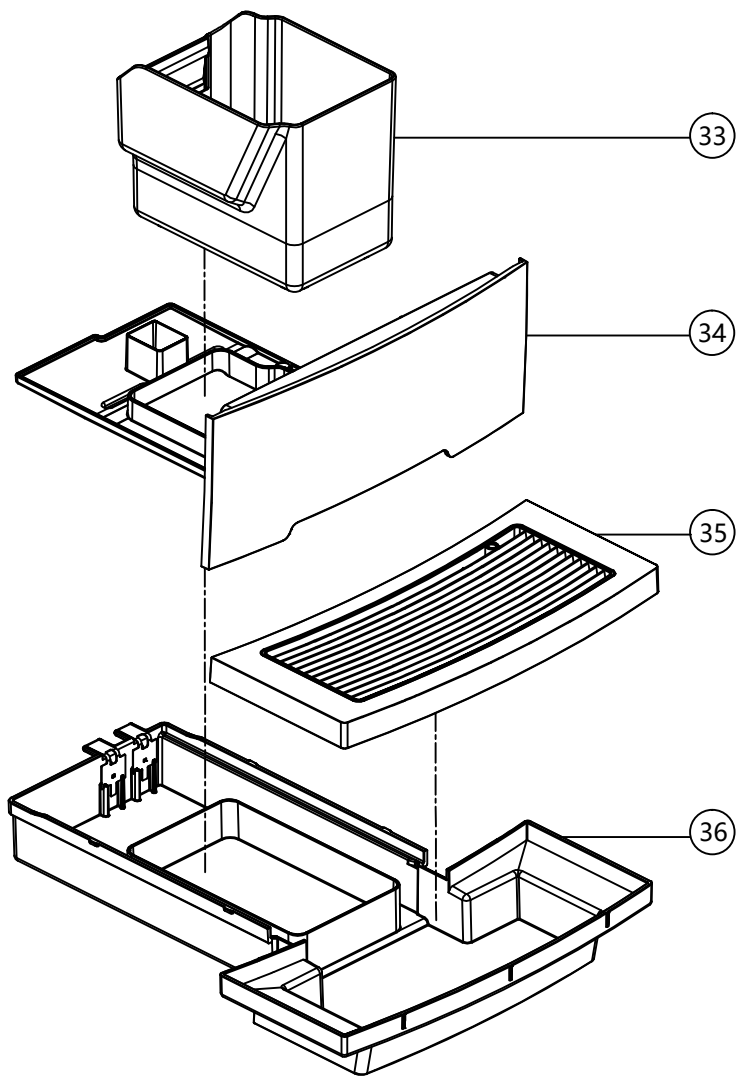


ITEM	DWG NO.	ENGLISH NAME	名称
33	7.NN.0368	Coffee grounds container	F10废渣盒
34	7.NN.0540	Coffee grounds container support(silver)	F11废渣盒支撑板（银色）
	7.NN.0547	Coffee grounds container support(black)	F11废渣盒支撑板（黑色）
	7.NN.0548	Coffee grounds container support(white)	F11废渣盒支撑板（白色）
	7.NN.0549	Coffee grounds container support(wine red)	F11废渣盒支撑板（酒红色）
	7.NN.0550	Coffee grounds container support(orange)	OCS废渣盒支撑板（橙黄色）
	7.NN.0551	Coffee grounds container support(milky white)	OCS废渣盒支撑板（奶白色）
	7.NN.0552	Coffee grounds container support(ice blue)	OCS废渣盒支撑板（冰蓝色）
35	7.NN.0124	Drip tray grill assembly	F11蓄水盘盖组
36	7.NN.0543	Drip tray	F10蓄水盘

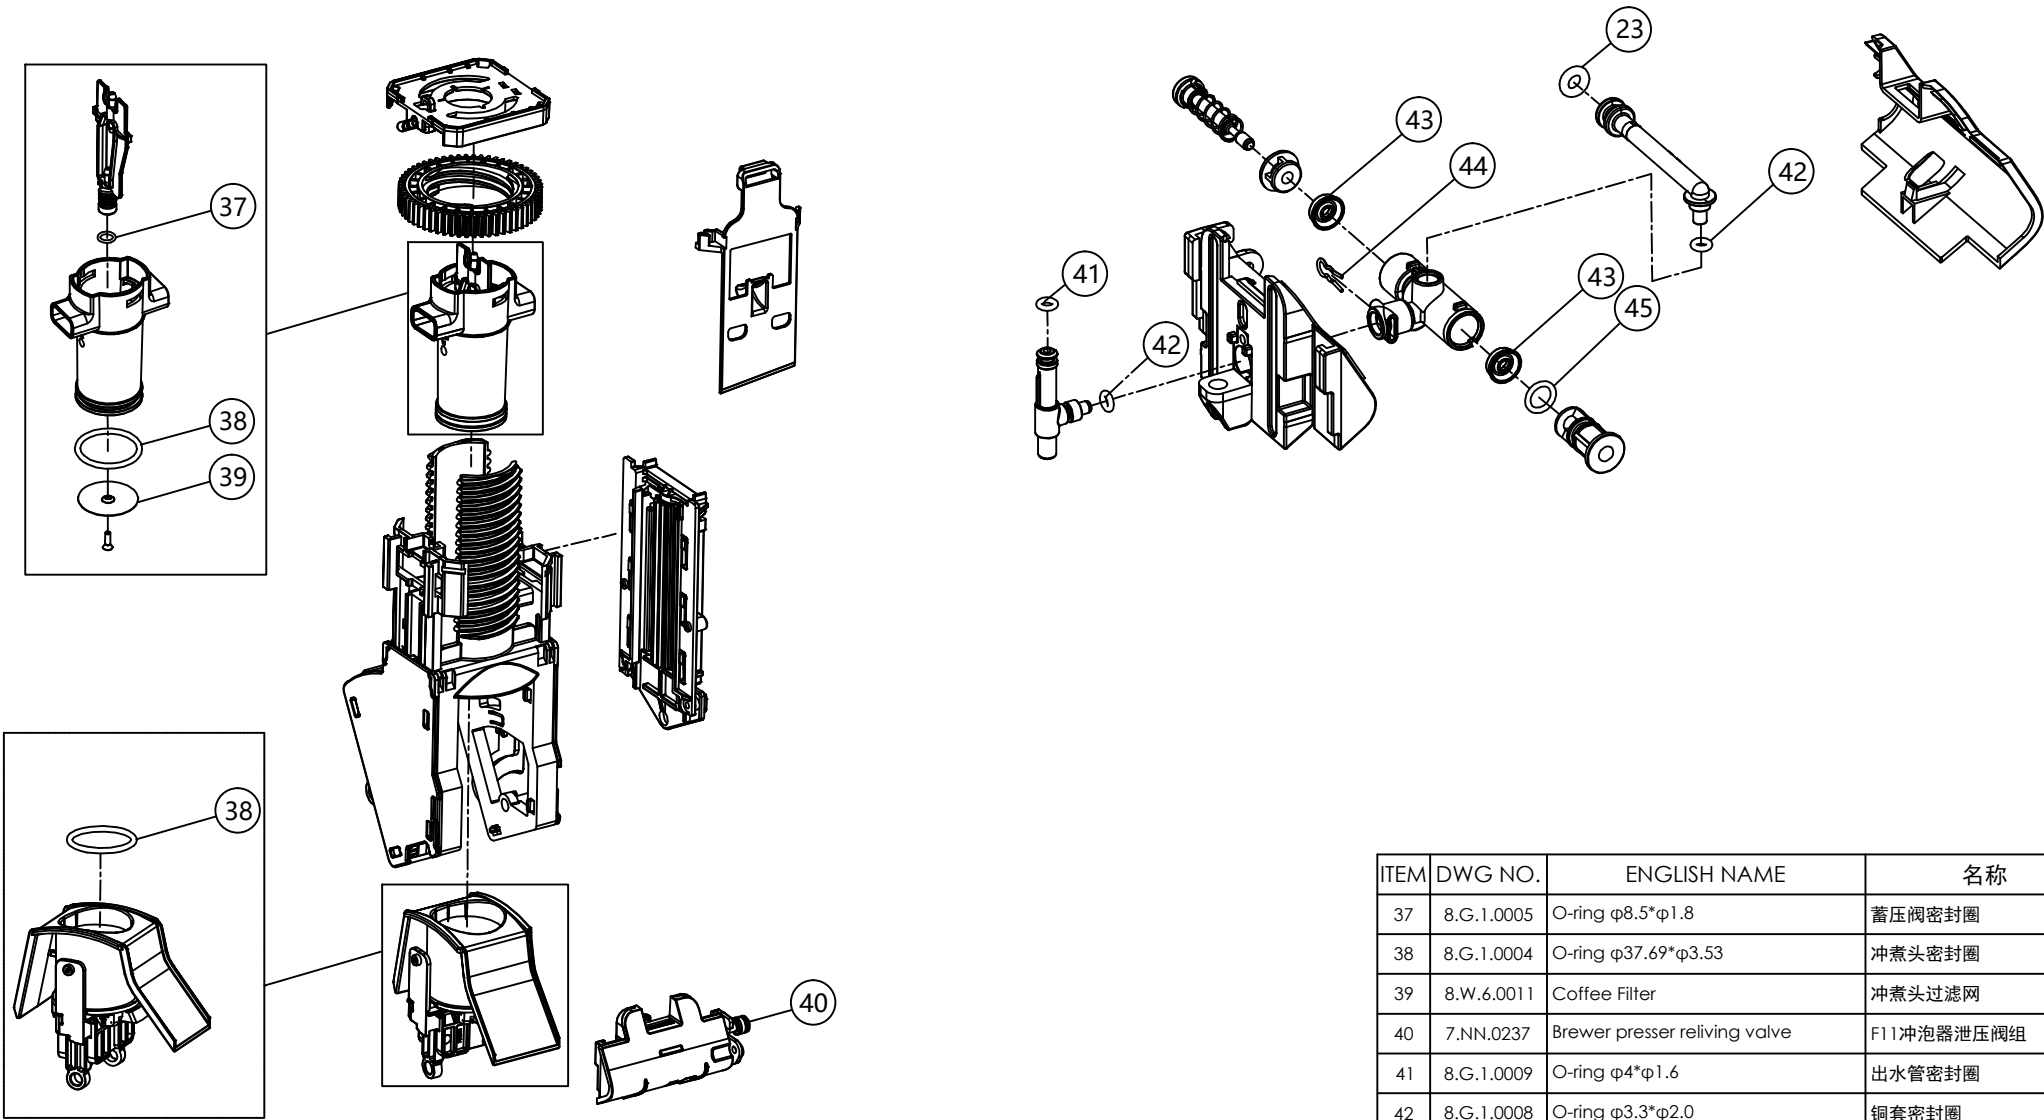


ITEM	DWG NO.	ENGLISH NAME	名称
37	8.G.1.0005	O-ring φ8.5*φ1.8	蓄压阀密封圈
38	8.G.1.0004	O-ring φ37.69*φ3.53	冲煮头密封圈
39	8.W.6.0011	Coffee Filter	冲煮头过滤网
40	7.NN.0237	Brewer presser relieving valve	F11冲泡器泄压阀组
41	8.G.1.0009	O-ring φ4*φ1.6	出水管密封圈
42	8.G.1.0008	O-ring φ3.3*φ2.0	铜套密封圈
43	8.G.2.0007	Y-ring φ12.20*φ3.65	泄压阀Y型密封圈
44	8.W.5.0023	Spring clip	通用弹簧夹
45	8.G.1.0007	O-ring φ8*φ1.8	泄水管密封圈
23	8.G.1.0001	O-ring φ5.0*φ3.0	水箱止逆阀密封圈

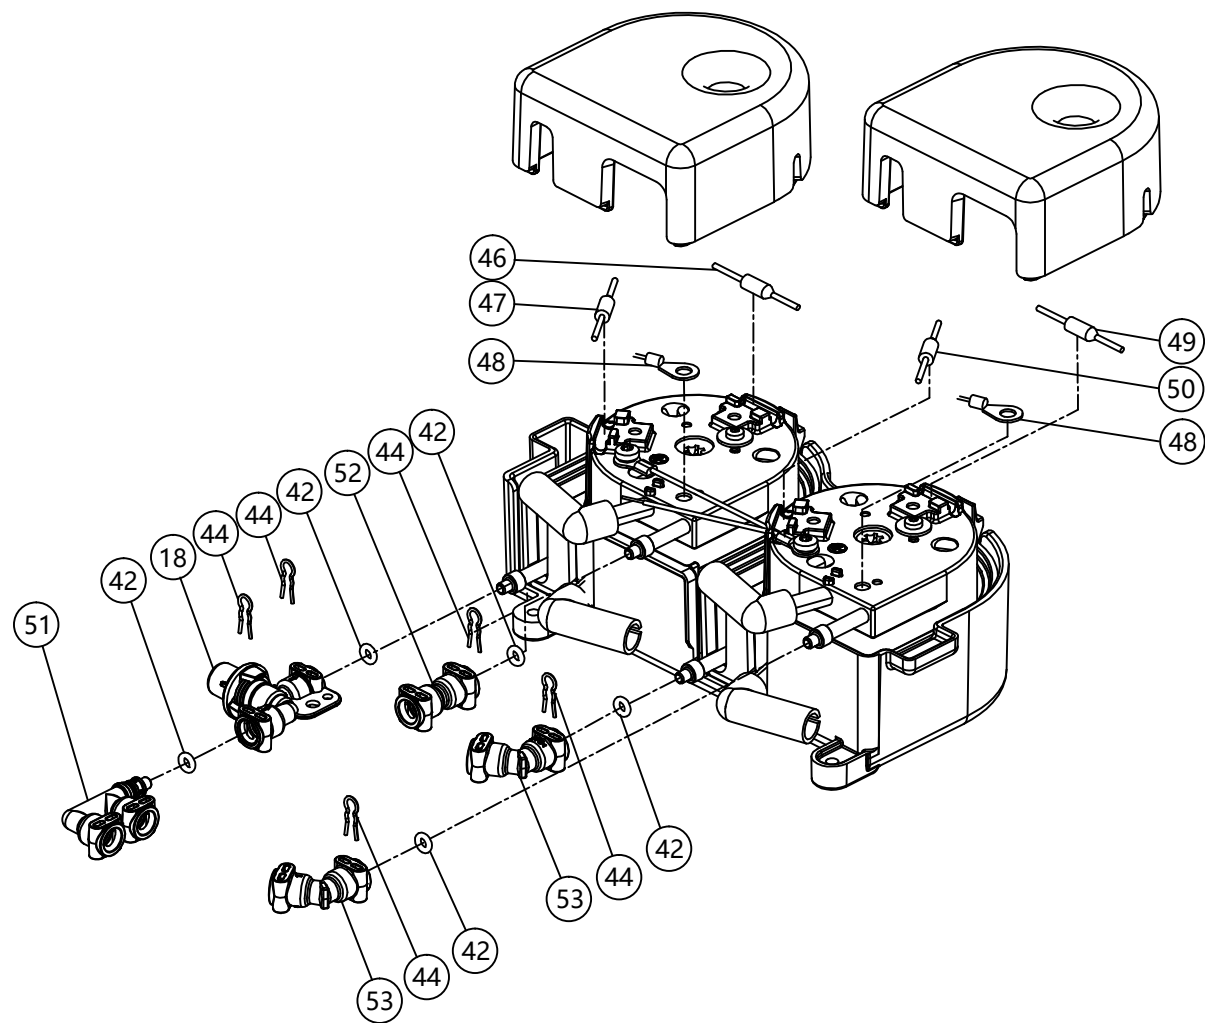


ITEM	DWG NO.	ENGLISH NAME	名称
46	8.D.2.0238	Coffee fused-cord-L(220-240V)	咖啡电热盘火线(220-240V)
47	8.D.2.0237	Coffee fused-cord-N(220-240V)	咖啡电热盘零线(220-240V)
48	8.D.3.0004	Temperature Sensor	电热盘NTC
49	8.D.2.0240	Steam fused-cord-L(220-240V)	蒸汽电热盘火线(220-240V)
50	8.D.2.0239	Steam fused-cord-N(220-240V)	蒸汽电热盘零线(220-240V)
51	8.S.1.0059	Fitting	F型接头
42	8.G.1.0008	O-ring φ3.3*φ2.0	铜套密封圈
18	7.NN.0009	Dispenser valve 3W	蓄压阀组
44	8.W.5.0023	Spring clip	通用弹簧夹
52	8.S.1.0058	Fitting	直通接头
53	8. S. 1. 0428	Fitting	120度两通接头

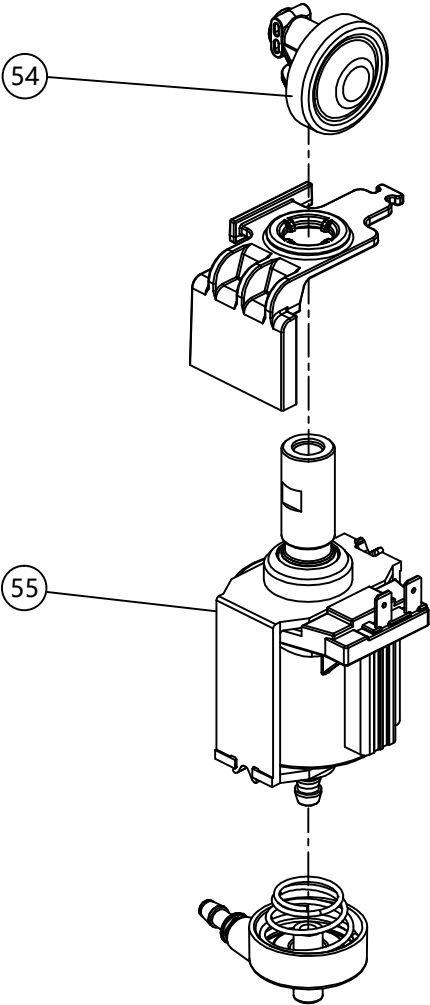

ITEM	DWG NO.	ENGLISH NAME	名称
54	7.NN.0012	Membrane controller group	稳压阀组
55	8.D.3.0051	Pump (220-240V 50Hz)	水泵 (220-240V 50Hz)
	8.D.3.0052	Pump (220-240V 60Hz)	水泵 (220-240V 60Hz)

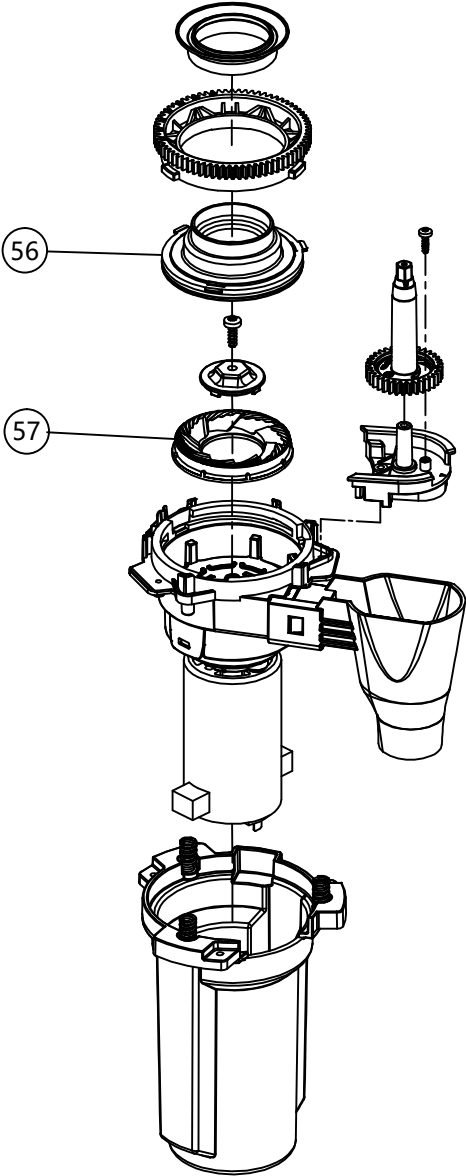

ITEM	DWG NO.	ENGLISH NAME	名称
56	7.NN.0119	Upper grinder burr assembly	上刀盘组
57	8.T.1.0003	Grinder burr	磨豆刀

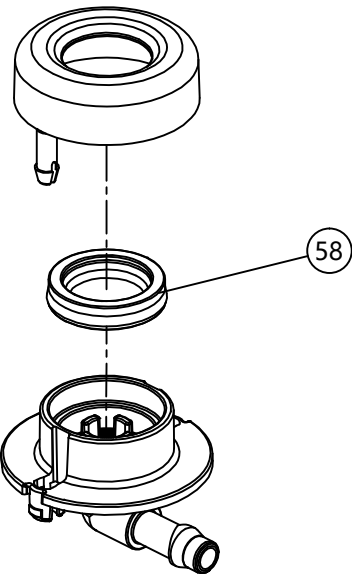

ITEM	DWG NO.	ENGLISH NAME	名称
58	8.G.2.0014	Y-ring $\phi 22.67 * \phi 13.90$	导水座Y型密封圈